


# Enabling Application Portability across HPC Platforms: An Application Perspective

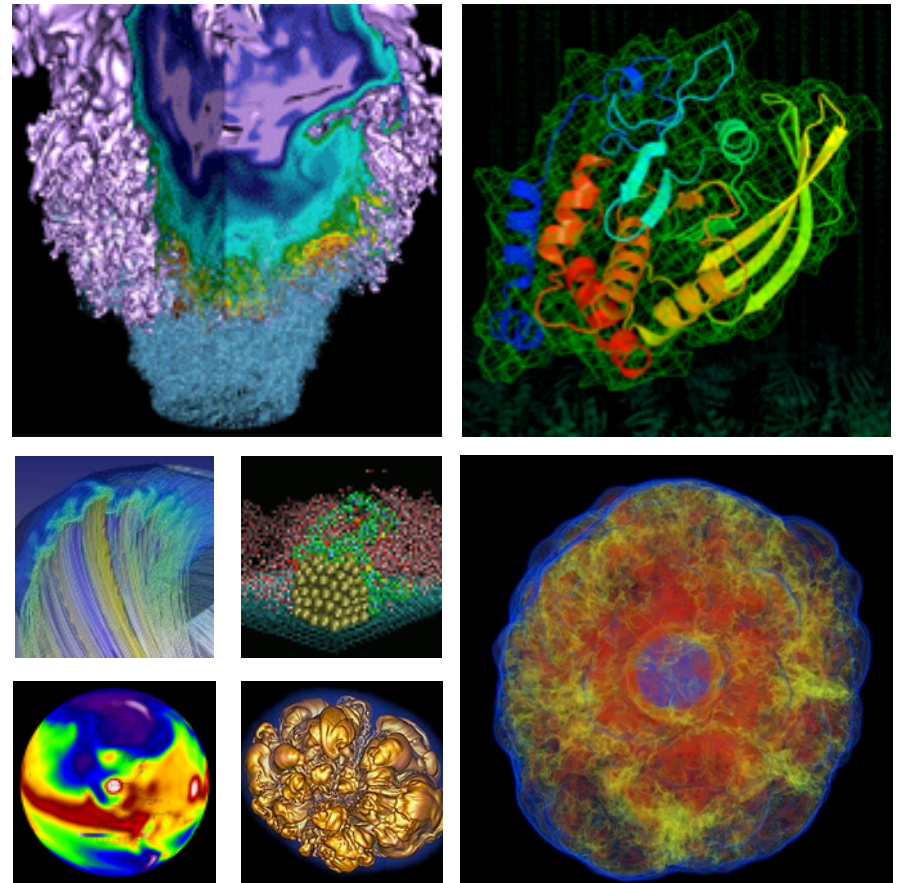

Alice KONIGES<sup>1</sup>, Tim MATTSON<sup>2</sup>, Fernanda FOERTTER<sup>3</sup>,  
Yun (Helen) HE<sup>1</sup>, Richard GERBER<sup>1</sup>

*1) Lawrence Berkeley National Laboratory, USA*

*2) Intel*

*3) Oak Ridge National Laboratory, USA*

September, 2015

# Disclaimer

- The views expressed in this talk are those of the speakers and not their employers.
- I work with very smart people. Anything stupid I say is mine ... don't blame my collaborators.



I work in Intel's research labs. I don't build products. Instead, I get to poke into dark corners and think silly thoughts... just to make sure we don't miss any great ideas.

Hence, my views are by design far "off the roadmap".

- This presentation is a "conversation" between two talks .. One from NERSC and one from me. Just to be clear, when a slide comes from "my talk" I always indicate that fact by putting a picture of me in a kayak on the slide in question.

# Cori: A pre-exascale supercomputer for the Office of Science workload




- System will begin to transition the workload to more energy efficient architectures
- Will showcase technologies expected in exascale systems
  - Processors with many 'slow' cores and longer vector units
  - Deepening memory and storage hierarchies



Image source: Wikipedia

System named after Gerty Cori, Biochemist and first American woman to receive the Nobel prize in science.

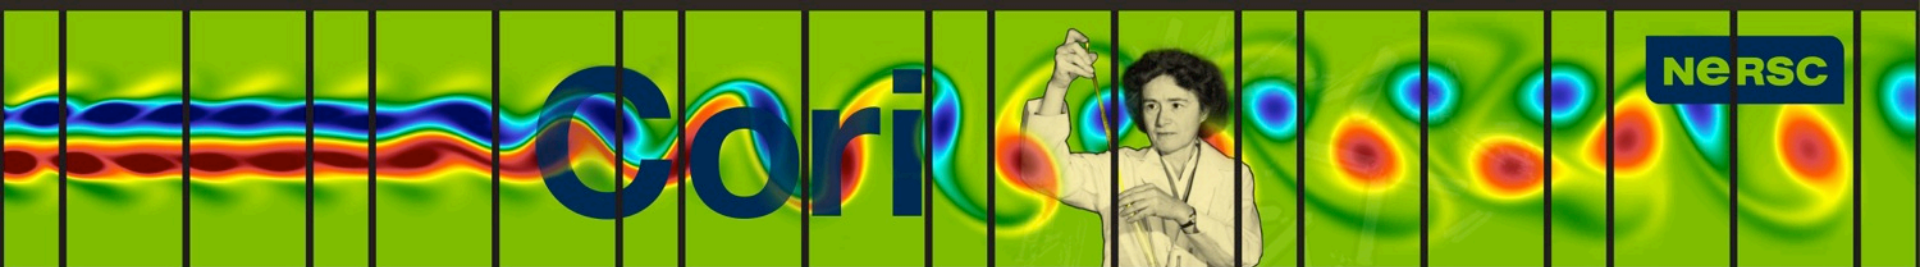

# Cori: A pre-exascale supercomputer for the Office of Science workload



- System will begin to transition the workload to more energy efficient architectures
- Will showcase technologies expected in exascale systems



It is so nice that they named their machine after a chemist. Chemists rule!!!!

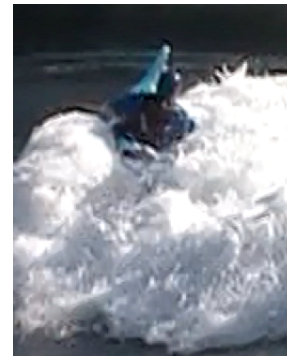


Image source: Wikipedia

System named after Gerty Cori, Biochemist and first American woman to receive the Nobel prize in science.





# Cori Configuration – and a new home



- **Over 9,300 Knights Landing compute nodes**
  - Self-hosted, up to 72 cores, 16 GB high bandwidth memory
- **1,600 Haswell compute nodes as a data partition**
- **Aries Interconnect**
- **Lustre File system**
  - 28 PB capacity, >700 GB/sec I/O bandwidth
- **Delivery in two phases, summer 2015 and 2016 into new CRT facility**




# Cori Configuration – and a new home




- **Over 9,300 Knights Landing compute nodes**
  - Self-hosted, up to 72 cores, 16 GB high bandwidth
- **1,600 Haswell compute nodes**
  - a data partition
- **Aries Interconnect**
- **Lustre File system**
  - 28 PB capacity, >700 GB/sec I/O bandwidth
- **Delivery in two phases, summer 2015 and 2016 into new CRT facility**

Wait a minute. I'm the Intel guy.  
It's my job to talk about  
hardware

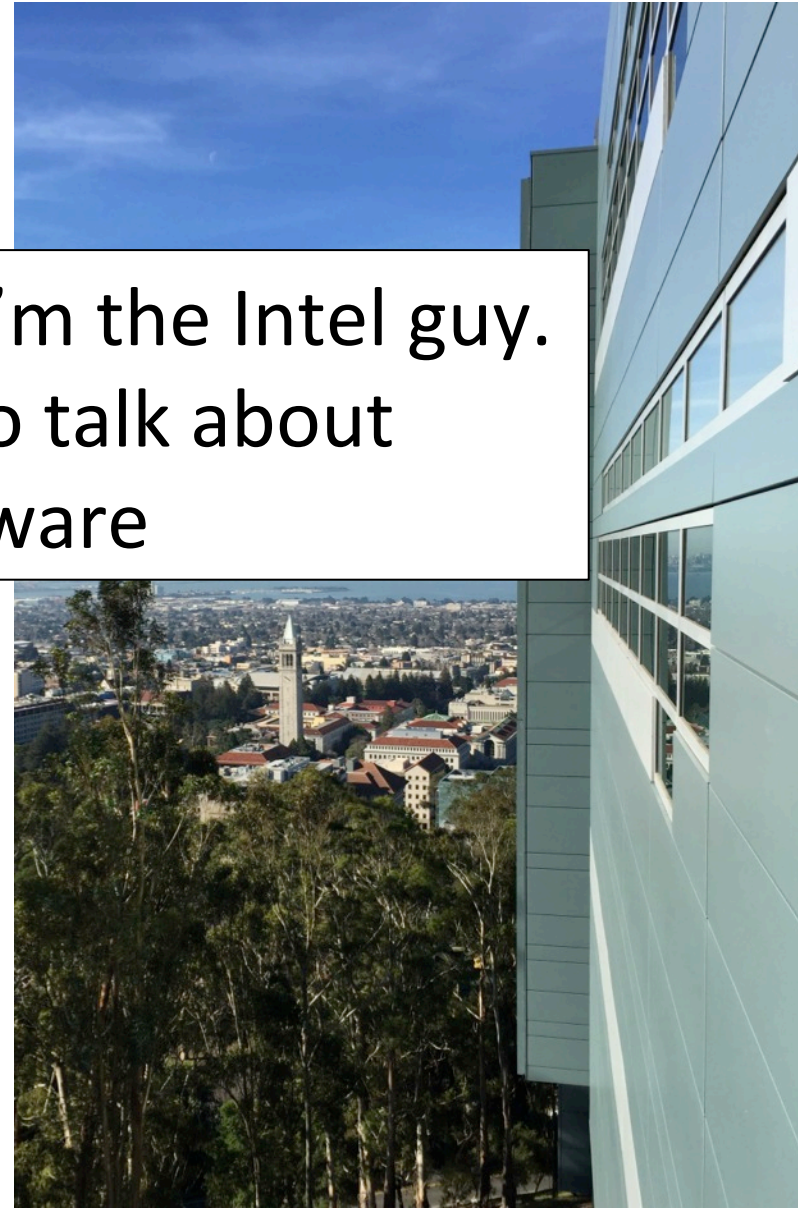

# Increasing parallelism in Xeon and Xeon Phi

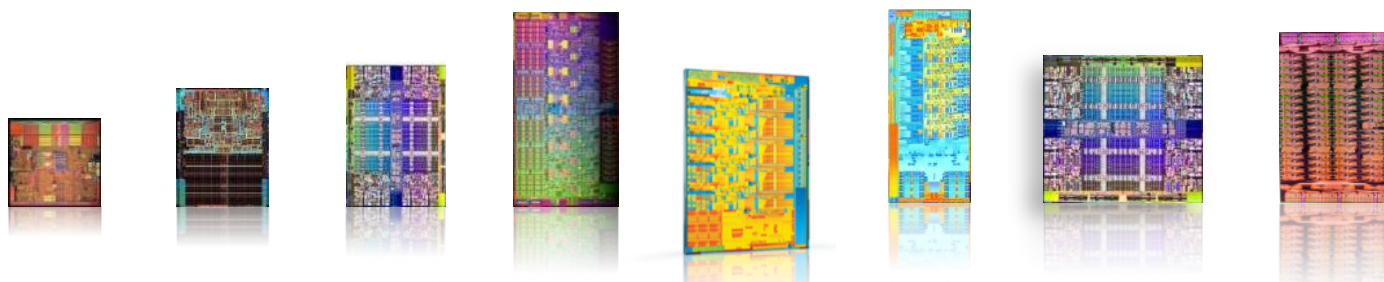

	Intel® Xeon® processor 64-bit series	Intel® Xeon® processor 5100 series	Intel® Xeon® processor 5500 series	Intel® Xeon® processor 5600 series	Intel® Xeon® processor code-named Sandy Bridge EP	Intel® Xeon® processor code-named Ivy Bridge EP	Intel® Xeon® processor code-named Haswell EX	Intel® Xeon Phi™ coprocessor Knights Corner	Intel® Xeon Phi™ processor & coprocessor Knights Landing <sup>1</sup>
Core(s)	1	2	4	6	8	12	18	61	60+
Threads	2	2	8	12	16	24	36	244	4x #cores
SIMD Width	128	128	128	128	256	256	256	512	2x512

<sup>\*</sup>Product specification for launched and shipped products available on [ark.intel.com](http://ark.intel.com).


<sup>1</sup>. Not launched.



# Lots of cores with in package memory



## Knights Landing Overview

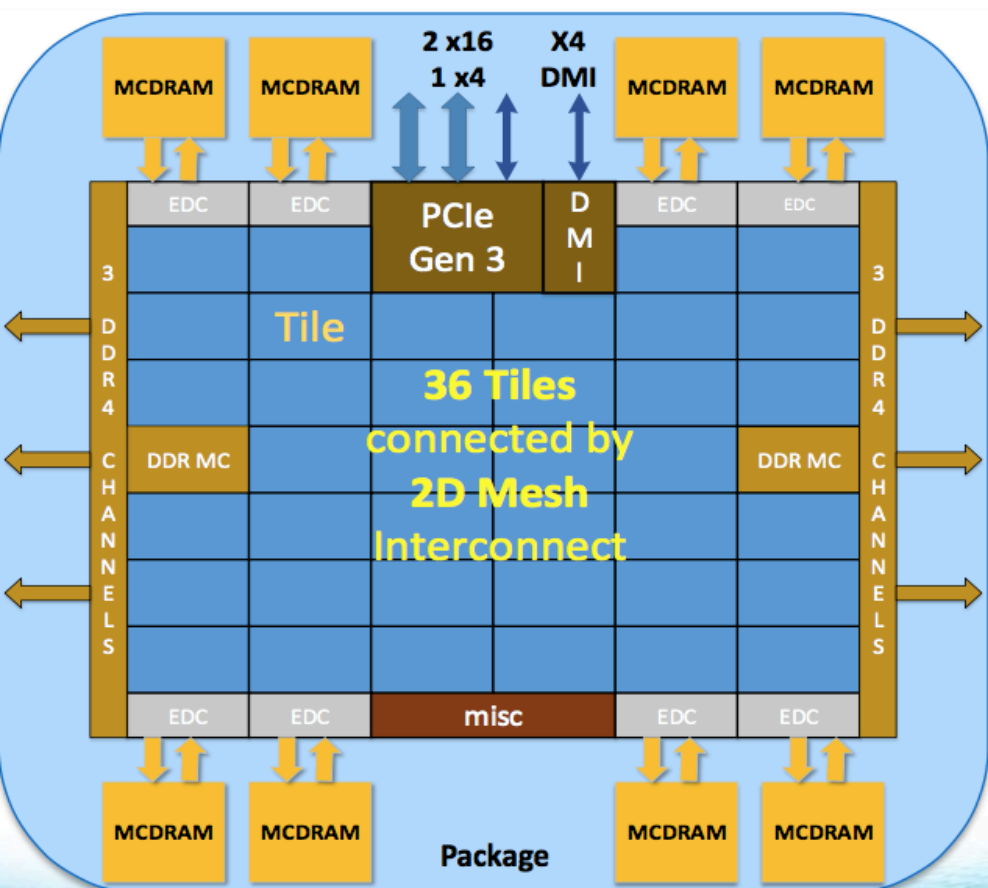

**TILE**

2 VPU	CHA	2 VPU
Core	1MB L2	Core

- Chip: 36 Tiles interconnected by 2D Mesh
- Tile: 2 Cores + 2 VPU/core + 1 MB L2
- Memory: MCDRAM: 16 GB on-package; High BW
- DDR4: 6 channels @ 2400 up to 384GB
- IO: 36 lanes PCIe Gen3. 4 lanes of DMI for chipset
- Node: 1-Socket only
- Fabric: Omni-Path on-package (not shown)
- Vector Peak Perf: 3+TF DP and 6+TF SP Flops
- Scalar Perf: ~3x over Knights Corner
- Streams Triad (GB/s): MCDRAM : 400+; DDR: 90+


Source Intel: All products, computer systems, dates and figures specified are preliminary based on current expectations, and are subject to change without notice. KNL data are preliminary based on current expectations and are subject to change without notice. 1Binary Compatible with Intel Xeon processors using Haswell Instruction Set (except TSX). 2Bandwidth numbers are based on STREAM-like memory access pattern when MCDRAM used as flat memory. Results have been estimated based on internal Intel analysis and are provided for informational purposes only. Any difference in system hardware or software design or configuration may affect actual performance.



# Connecting tiles



## KNL Mesh Interconnect

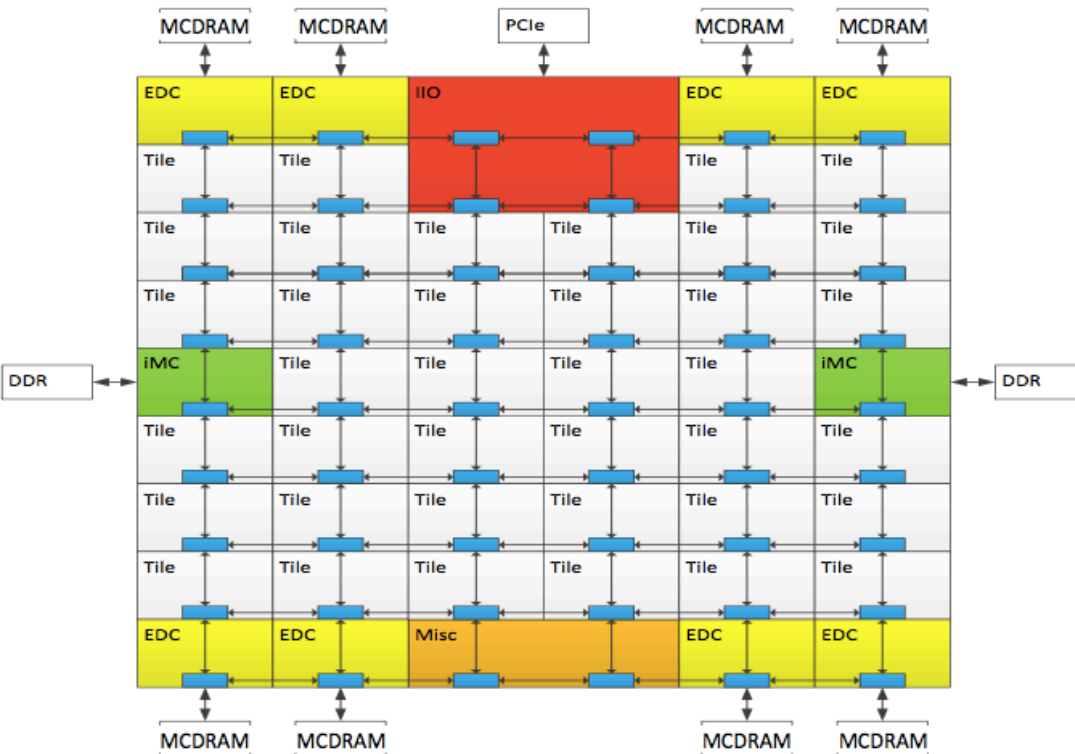

### Mesh of Rings

- Every row and column is a (half) ring
- YX routing: Go in Y → Turn → Go in X
- Messages arbitrate at injection and on turn

### Cache Coherent Interconnect

- MESIF protocol (F = Forward)
- Distributed directory to filter snoops

### Three Cluster Modes

(1) All-to-All (2) Quadrant (3) Sub-NUMA Clustering

# Network interface Chip in the package ...



## KNL w/ Intel® Omni-Path

Omni-Path Fabric integrated *on package*

First product with integrated fabric



Connected to KNL die via 2 x16 PCIe\* ports

Output: 2 Omni-Path ports

- 25 GB/s/port (bi-dir)

### Benefits

- Lower cost, latency and power
- Higher density and bandwidth
- Higher scalability

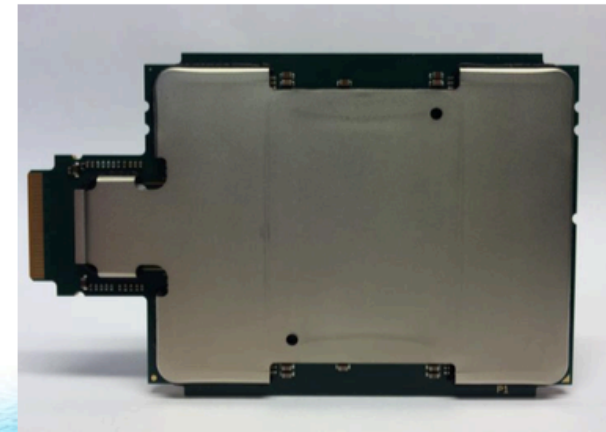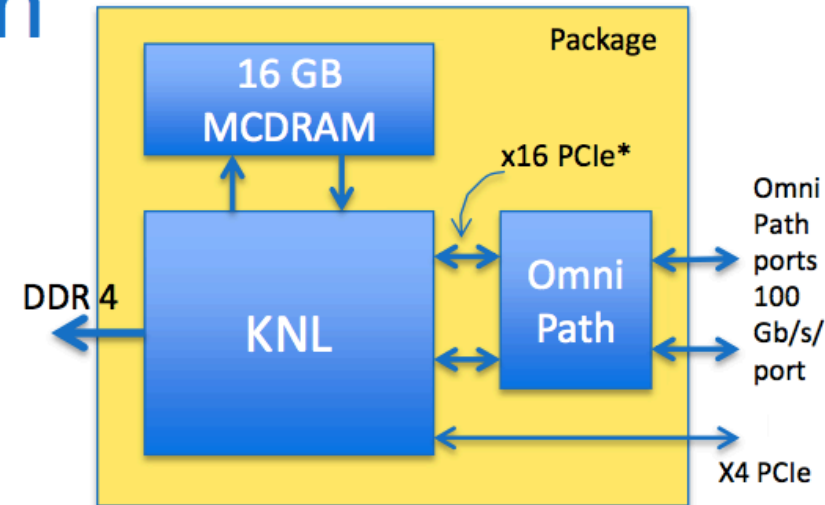

\*On package connect with PCIe semantics, with MCP optimizations for physical layer

# Knights Landing Integrated On-Package Memory

## Cache Model


Let the hardware automatically manage the integrated on-package memory as an “L3” cache between KNL CPU and external DDR

## Flat Model

Manually manage how your application uses the integrated on-package memory and external DDR for peak performance

## Hybrid Model

Harness the benefits of both cache and flat models by segmenting the integrated on-package memory

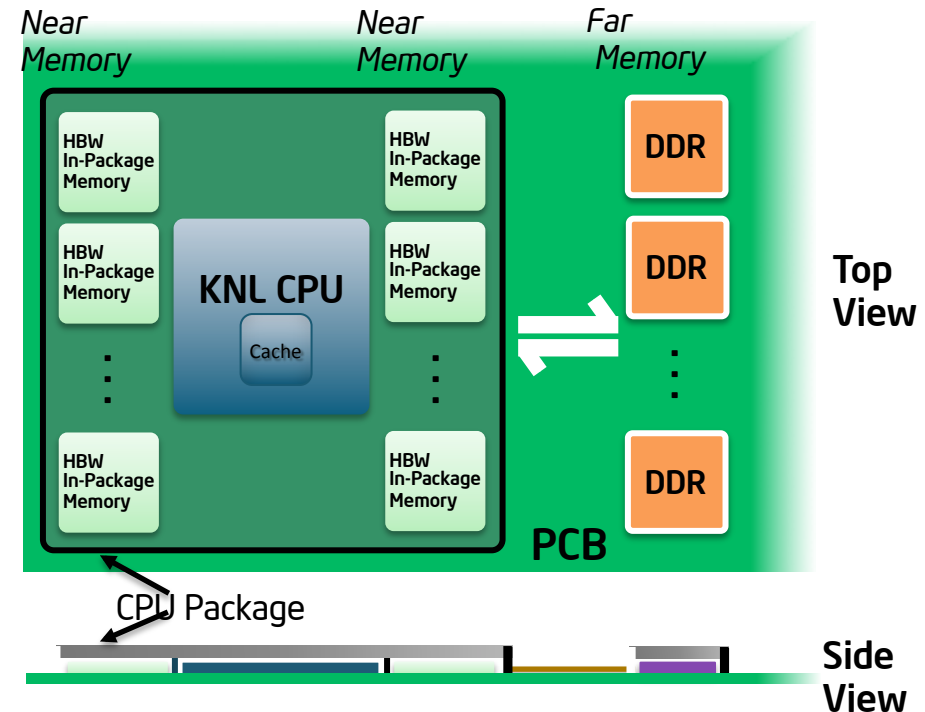

*Maximum performance through higher memory bandwidth and flexibility*

# To run effectively on Cori users will have to:



- **Manage Domain Parallelism**

- independent program units; explicit

- **Increase Node Parallelism**


- independent execution units within the program; generally explicit

- **Exploit Data Parallelism**

- Same operation on multiple elements

- **Improve data locality**

- Cache blocking;  
Use on-package memory

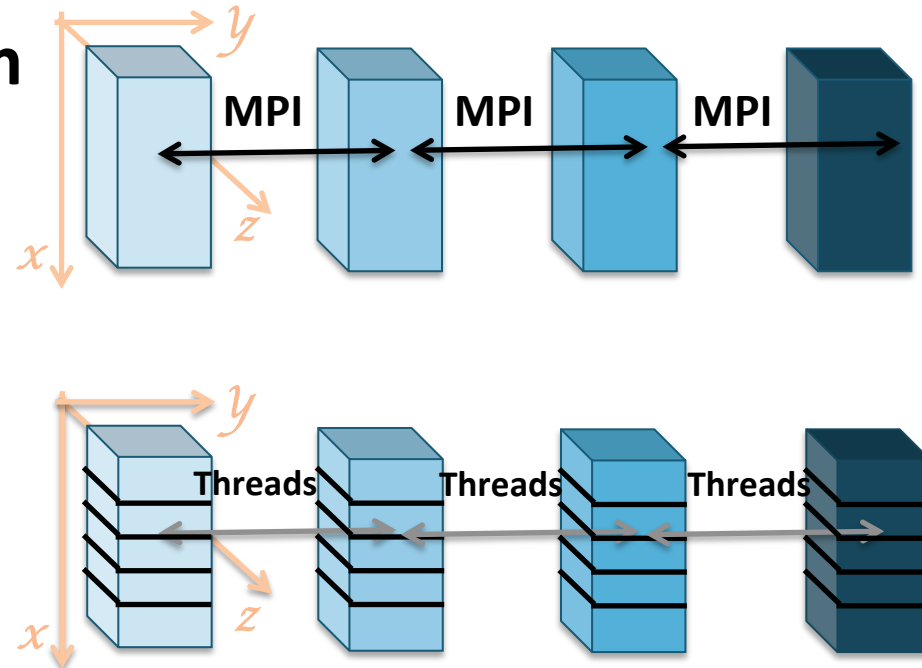

```
| --> DO I = 1, N  
|      R(I) = B(I) + A(I)  
| --> ENDDO
```




# To run effectively on Cori users will have to:




- **Manage Domain Parallelism**

- independent program units; explicit

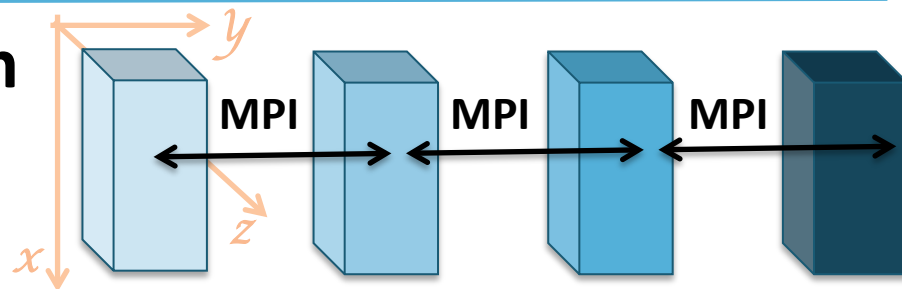

- **Increase Node Parallelism**

- independent execution units within the program; generally explicit

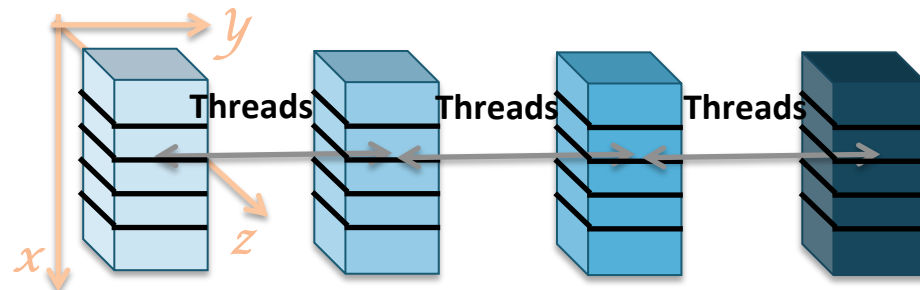

- **Exploit Data Parallelism**

- Same operation on multiple elements


- **Improve data locality**

- Cache blocking;  
Use on-package



```
--> DO I = 1, N  
      R(I) = R(I) + A(I)
```

You mean vectorization. The only way you can be happy with KNL is if you can keep the pair of vector units per core busy.

# Vector (SIMD) Programming

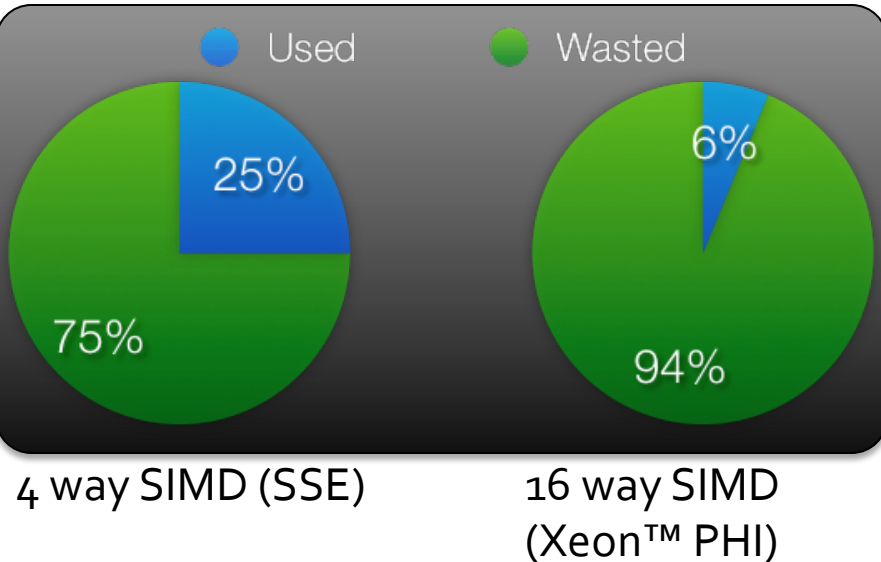

- Architects love vector units, since they permit space- and energy- efficient parallel implementations.
- However, standard SIMD instructions on CPUs are inflexible, and can be difficult to use.
- Options:
  - Let the compiler do the job
  - Assist the compiler with language level constructs for explicit vectorization.
  - Use intrinsics ... an assembly level approach.

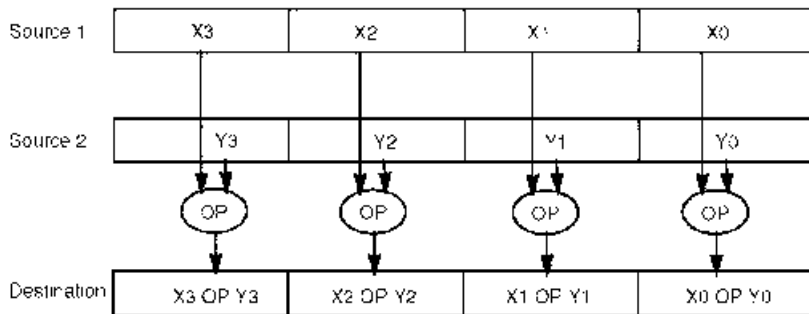

# Example Problem: Numerical Integration




Mathematically, we know that:

$$\int_0^1 \frac{4.0}{(1+x^2)} dx = \pi$$

We can approximate the integral as a sum of rectangles:

$$\sum_{i=0}^N F(x_i) \Delta x \approx \pi$$

Where each rectangle has width  $\Delta x$  and height  $F(x_i)$  at the middle of interval  $i$ .

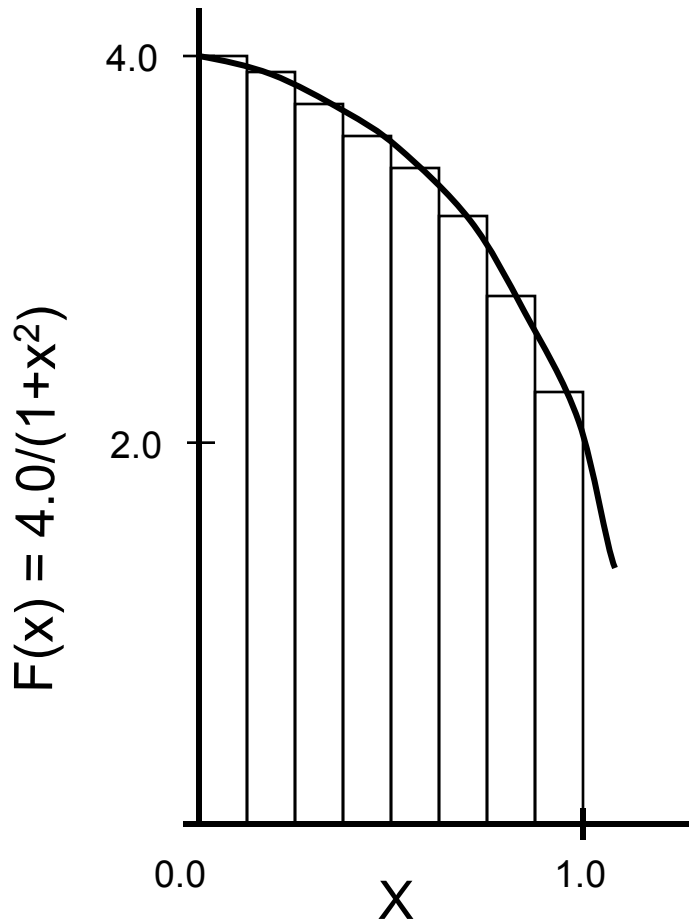

# Serial PI program



```
static long num_steps = 100000;
float step;
int main ()
{
    int i;    float x, pi, sum = 0.0;

    step = 1.0/(float) num_steps;

    for (i=0;i< num_steps; i++){
        x = (i+0.5)*step;
        sum = sum + 4.0/(1.0+x*x);
    }
    pi = step * sum;
}
```

Normally, I'd use double types throughout to minimize roundoff errors especially on the accumulation into sum. But to maximize impact of vectorization for these exercise, we'll use float types.



# Explicit Vectorization PI program



```
static long num_steps = 100000;
float step;
int main ()
{
    int i;    float x, pi, sum = 0.0;

    step = 1.0/(float) num_steps;
    #pragma omp simd reduction(+:sum)
    for (i=0;i< num_steps; i++){
        x = (i+0.5)*step;
        sum = sum + 4.0/(1.0+x*x);
    }
    pi = step * sum;
}
```

Note that literals (such as 4.0, 1.0 and 0.5) are not explicitly declared with the desired type. The C language treats these as “double” and that impacts compiler optimizations. We call this the default case.

# Explicit Vectorization PI program



```
static long num_steps = 100000;
float step;
int main ()
{
    int i;    float x, pi, sum = 0.0;

    step = 1.0f/(float) num_steps;
    #pragma omp simd reduction(+:sum)
    for (i=0;i< num_steps; i++){
        x = (i+0.5f)*step;
        sum = sum + 4.0f/(1.0f+x*x);
    }
    pi = step * sum;
}
```

Literals as double (no-vec), 0.012 secs
Literals as Float (no-vec), 0.0042 secs

Note that literals (such as 4.0, 1.0 and 0.5) are explicitly declared as type float (to match the types of the variables in this code. This greatly enhances vectorization and compiler optimization.

# Pi Program: Vectorization with intrinsics (SSE)



```
float pi_sse(int num_steps)
{ float scalar_one = 1.0, scalar_zero = 0.0, ival, scalar_four = 4.0, step, pi, vsum[4];
  step = 1.0/(float) num_steps;

  __m128 ramp  = _mm_setr_ps(0.5, 1.5, 2.5, 3.5);
  __m128 one   = _mm_load1_ps(&scalar_one);
  __m128 four  = _mm_load1_ps(&scalar_four);
  __m128 vstep = _mm_load1_ps(&step);
  __m128 sum   = _mm_load1_ps(&scalar_zero);
  __m128 xvec; __m128 denom; __m128 eye;

  for (int i=0;i< num_steps; i=i+4){      // unroll loop 4 times
    ival    = (float)i;                  // and assume num_steps%4 = 0
    eye     = _mm_load1_ps(&ival);
    xvec    = _mm_mul_ps(_mm_add_ps(eye,ramp),vstep);
    denom   = _mm_add_ps(_mm_mul_ps(xvec,xvec),one);
    sum     = _mm_add_ps(_mm_div_ps(four,denom),sum);
  }
  _mm_store_ps(&vsum[0],sum);
  pi = step * (vsum[0]+vsum[1]+vsum[2]+vsum[3]);
  return pi;
}
```

# Pi Program: Vector intrinsics plus OpenMP



```
float pi_sse(int num_steps)
{ float scalar_one=1.0, scalar_zero=0.0, ival, scalar_four=4.0, step, pi, vsum[4];
  float local_sum[NTHREADS]; // set NTHREADS elsewhere, often to num of cores
  step = 1.0/(float) num_steps; pi = 0.0;
#pragma omp parallel
{ int i, ID=omp_get_thread_num();
  __m128 ramp = _mm_setr_ps(0.5, 1.5, 2.5, 3.5);
  __m128 one = _mm_load1_ps(&scalar_one);
  __m128 four = _mm_load1_ps(&scalar_four);
  __m128 vstep = _mm_load1_ps(&step);
  __m128 sum = _mm_load1_ps(&scalar_zero);
  __m128 xvec; __m128 denom; __m128 eye;
#pragma omp for
  for (int i=0;i<num_steps;i=i+4){
    ival = (float)i;
    eye = _mm_load1_ps(&ival);
    xvec = _mm_mul_ps(_mm_add_ps(eye,ramp),vstep);
    denom = _mm_add_ps(_mm_mul_ps(xvec,xvec),one);
    sum = _mm_add_ps(_mm_div_ps(four,denom),sum);
  }
  _mm_store_ps(&vsum[0],sum);
local_sum[ID] = step * (vsum[0]+vsum[1]+vsum[2]+vsum[3]);
}
for(int k = 0; k<NUM_THREADS;k++) pi+=local_sum[k];
return pi;
}
```

To parallelize with OpenMP:

1. Promote local\_sum to an array to there is a variable private to each thread but available after the parallel region
2. Add parallel region and declare vector registers inside the parallel region so each thread has their own copy.
3. Add workshop loop (for) construct
4. Add local sums after the parallel region to create the final value for pi




# PI program Results:

4194304 steps

Times in Seconds (50 runs, min time reported)



**run times(sec)**

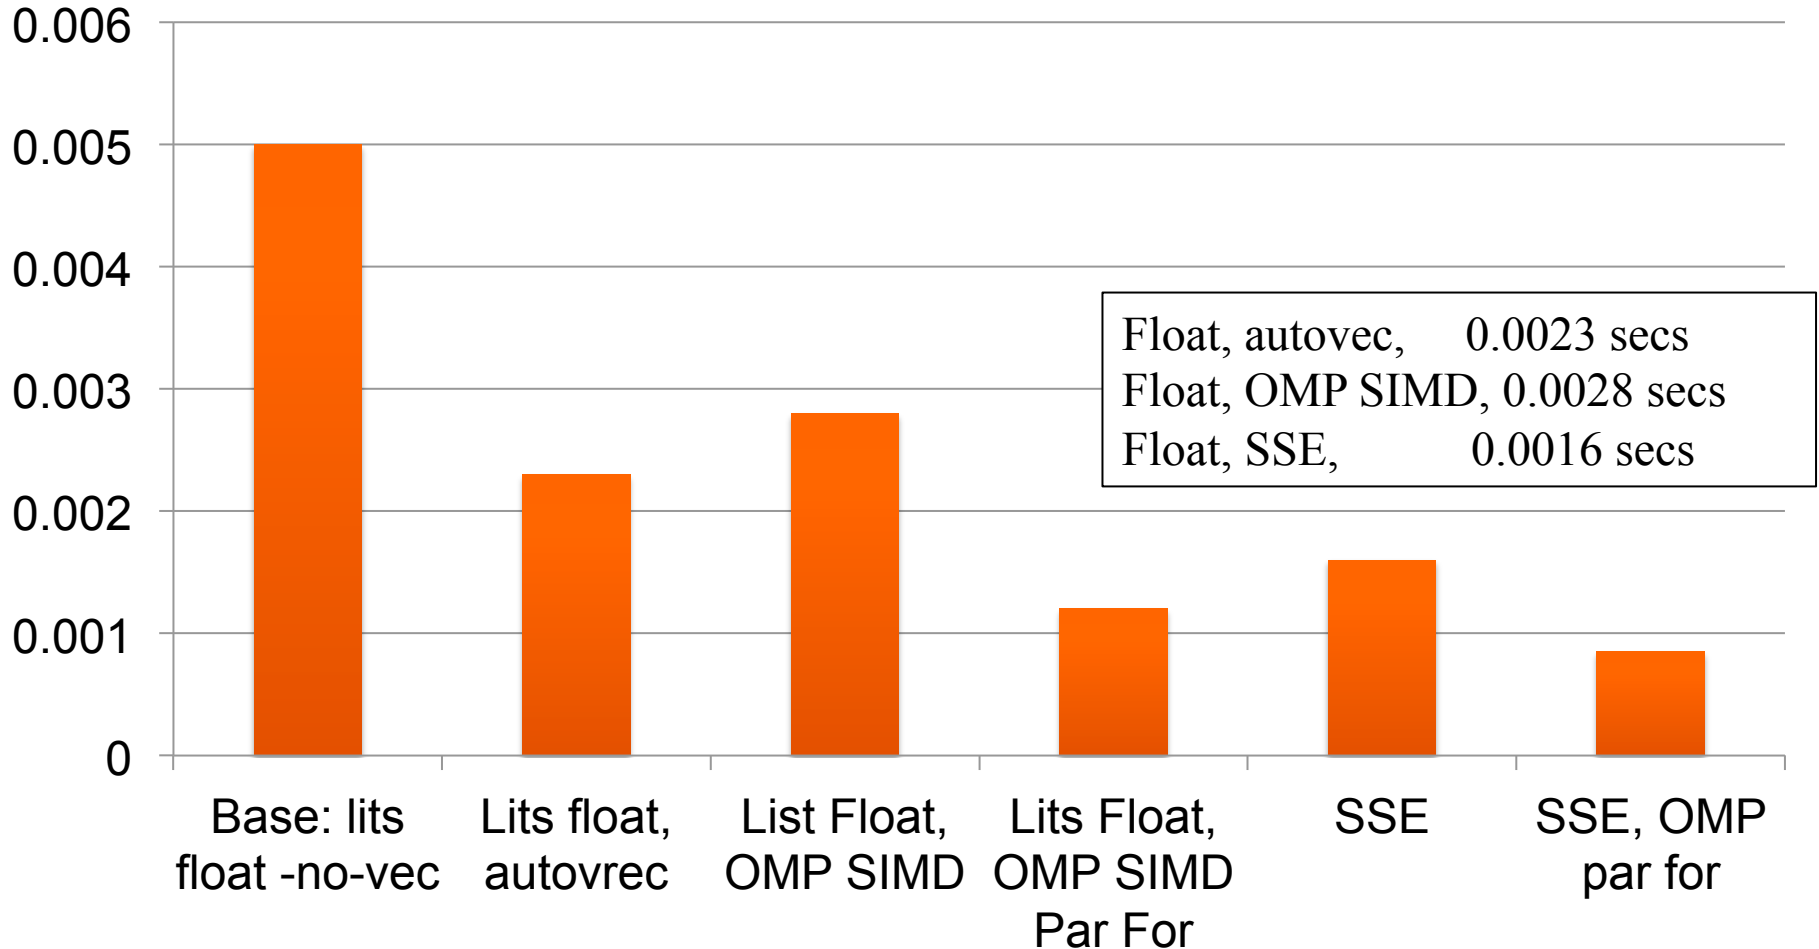


- Intel Core i7, 2.2 Ghz, 8 GM 1600 MHz DDR3, Apple MacBook Air OS X 10.10.5.
- Intel(R) C Intel(R) 64 Compiler XE for applications running on Intel(R) 64, Version 15.0.3.187 Build 20150408

# Explicit Vectorization – Performance Impact



Explicit Vectorization looks better when you move to more complex problems.

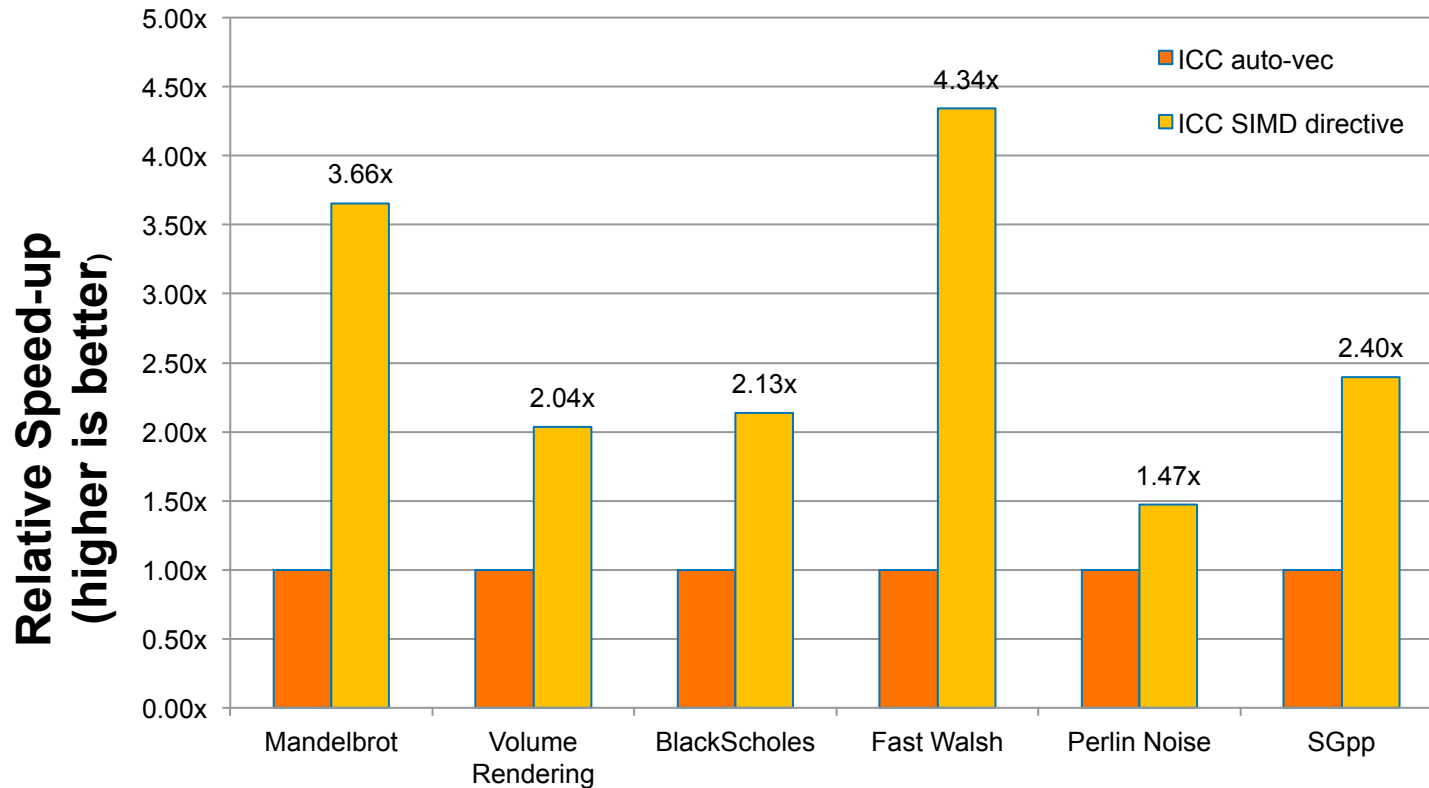

Source: M. Klemm, A. Duran, X. Tian, H. Saito, D. Caballero, and X. Martorell, “Extending OpenMP with Vector Constructs for Modern Multicore SIMD Architectures. In Proc. of the Intl. Workshop on OpenMP”, pages 59-72, Rome, Italy, June 2012. LNCS 7312.

# What about application portability?

---

- **Major US computer centers have and will continue to have fundamentally different architectures, for example:**
  - NERSC is based on KNL
  - OLCF and LLNL have announced an IBM+NVIDIA architecture
  - FUNDAMENTALLY DIFFERENT
- **Will applications be able to run across both architectures?**
- **Several DOE workshops to address portability**
  - Best Practices Application portability workshop – Sept 2015


# Application Programmers Dilemma

---

- **It actually only seemed hard before –**
  - First there were vectors, we coped
  - Then there was the MPP revolution so,
    - We ripped out all that vector code in favor of message passing
    - We finally came up with a standard that most could live with –MPI
  - For the brave of heart you could try MPI + OpenMP, but it really didn't do much
  - OpenMP worked well on smaller numbers of processors (cores) in shared memory

# Application Programmers Dilemma

Scaling is typically a function of the algorithm and how you use an API, not the API itself. I haven't seen the codes my good friends from NERSC are talking about when making this statement, but in my experience, HPC codes often poorly use OpenMP. They just litter their codes with "parallel for"; not thinking about restructuring code to optimize data access patterns (NUMA issues) and reduce thread management overhead

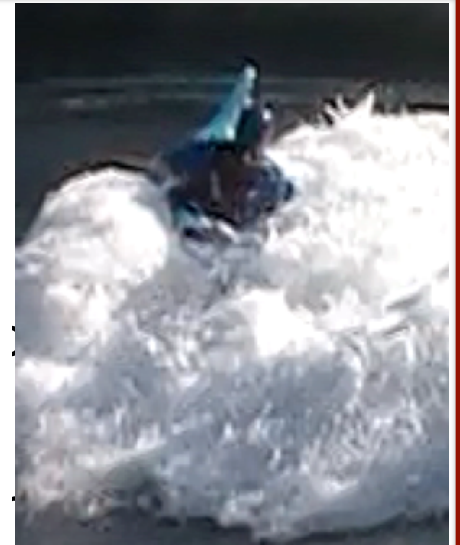

with – MPI

- For the brave of heart you could try MPI + OpenMP, but it really didn't do much
- OpenMP worked well on smaller numbers of processors (cores) in shared memory



# Programming Models by the Dozen, what to do now

---

Emperor Joseph II: My dear young man, don't take it too hard. Your work is ingenious. It's quality work. And there are simply too many notes, that's all. Just cut a few and it will be perfect.

Mozart: Which few did you have in mind, Majesty?



# We tried to solve the programmability problem by searching for the right programming environment

## Parallel programming environments in the 90's

ABCPL	CORRELATE	GLU	Mentat	Parafraze2	pC++
ACE	CPS	GUARD	Legion	Paralation	SCCHEDULE
ACT++	CRL	HASL.	Meta Chaos	Parallel-C++	SciTL
Active messages	CSP	Haskell	Midway	Parallaxis	POET
Adl	Cthreads	HPC++	Millipede	ParC	SDDA.
Adsmith	CUMULVS	JAVAR.	CparPar	ParLib++	SHMEM
ADDAP	DAGGER	HORUS	Mirage	ParLin	SIMPLE
AFAPI	DAPPLE	HPC	MpC	Parmacs	Sina
ALWAN	Data Parallel C	IMPACT	MOSIX	Parti	SISAL.
AM	DC++	ISIS.	Modula-P	pC	distributed smalltalk
AMDC	DCE++	JAVAR	Modula-2*	pC++	SMI.
AppLeS	DDD	JADE	Multipol	PCN	SONiC
Amoeba	DICE.	Java RMI	MPI	PCP:	Split-C.
ARTS	DIPC	javaPG	MPC++	PH	SR
Athapascan-0b	DOLIB	JavaSpace	Munin	PEACE	Sthreads
Aurora	DOME	JIDL	Nano-Threads	PCU	Strand.
Automap	DOSMOS.	Joyce	NESL	PET	SUIF.
bb_threads	DRL	Khoros	NetClasses++	PETSc	Synergy
Blaze	DSM-Threads	Karma	Nexus	PENNY	Telegrphos
BSP	Ease .	KOAN/Fortran-S	Nimrod	Phosphorus	SuperPascal
BlockComm	ECO	LAM	NOW	POET.	TCGMSG.
C*.	Eiffel	Lilac	Objective Linda	Polaris	Threads.h++.
"C* in C	Eilean	Linda	Occam	POOMA	TreadMarks
C**	Emerald	JADA	Omega	POOL-T	TRAPPER
CarLOS	EPL	WWWinda	OpenMP	PRESTO	uC++
Cashmere	Excalibur	ISETL-Linda	Orca	P-RIO	UNITY
C4	Express	ParLin	OOF90	Prospero	UC
CC++	Falcon	Eilean	P++	Proteus	V
Chu	Filaments	P4-Linda	P3L	QPC++	ViC*
Charlotte	FM	Glenda	p4-Linda	PVM	Visifold V-NUS
Charm	FLASH	POSYBL	Pablo	PSI	VPE
Charm++	The FORCE	Objective-Linda	PADE	PSDM	Win32 threads
Cid	Fork	LiPS	PADRE	Quake	WinPar
Cilk	Fortran-M	Locust	Panda	Quark	WWWinda
CM-Fortran	FX	Lparx	Papers	Quick Threads	XENOOPS
Converse	GA	Lucid	AFAPI.	Sage++	XPC
Code	GAMMA	Maisie	Para++	SCANDAL	Zounds
COOL	Glenda	Manifold	Paradigm	SAM	ZPL

**Third party names are the property of their owners.**

# A warning I've been making for the last 10 years




## Is it bad to have so many languages?

Too many options can hurt you

### ■ The Draeger Grocery Store experiment consumer choice:

- Two Jam-displays with coupon's for purchase discount.
  - 24 different Jam's
  - 6 different Jam's
- How many stopped by to try samples at the display?
- Of those who "tried", how many bought jam?

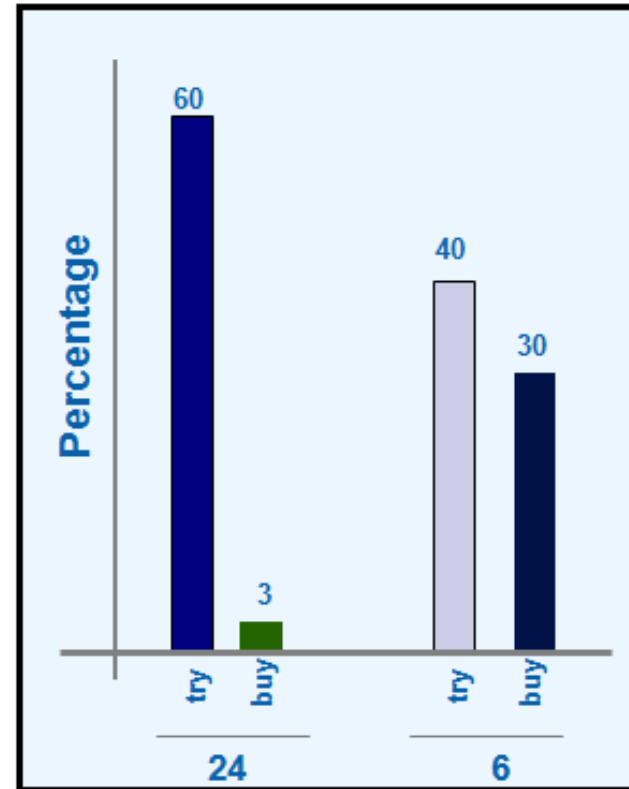

Programmers don't need a glut of options ... just give us something that works OK on every platform we care about. Give us a decent standard and we'll do the rest

The findings from this study show that an extensive array of options can at first seem highly appealing to consumers, yet can reduce their subsequent motivation to purchase the product.

Iyengar, Sheena S., & Lepper, Mark (2000). When choice is demotivating: Can one desire too much of a good thing? *Journal of Personality and Social Psychology*, 76, 995-1006.

# My optimistic view from 2005 ...



## Parallel Programming API's today

### ■ Thread Libraries

- Win32 API
- POSIX threads.

### ■ Compiler Directives

- OpenMP - portable shared memory parallelism.

### ■ Message Passing Libraries

- MPI - message passing

### ■ Coming soon ... a parallel language for managed runtimes? Java or X10?

**We don't want to scare away the programmers ... Only add a new API/language if we can't get the job done by fixing an existing approach.**

Third party names are the property of their owners.

**We've learned our lesson ... we emphasize a small number of industry standards**

# But we didn't learn our lesson

## History is repeating itself!



### **A small sampling of models from the NEW golden age of parallel programming (from the literature 2010-2012)**

AM++	Copperhead	ISPC	OpenACC	Scala
ArBB	CUDA	Java	PAMI	SIAL
BSP	DryadOpt	Liszt	Parallel Haskell	STAPL
C++11	Erlang	MapReduce	ParalleX	STM
C++AMP	Fortress	MATE-CG	PATUS	SWARM
Charm++	GA	MCAPI	PLINQ	TBB
Chapel	GO	MPI	PPL	UPC
Cilk++	Gossamer	NESL	Pthreads	Win32
CnC	GPars	OoOJava	PXIF	threads
coArray Fortran	GRAMPS	OpenMP	PyPar	X10
Codelets	Hadoop	OpenCL	Plan42	XMT
	HMMP	OpenSHMEM	RCCE	ZPL

**We've slipped back into the “just create a new language” mentality.**

Note: I'm not criticizing these technologies. I'm criticizing our collective urge to create so many of them.



# What has gone wrong?



- In the old days (the 90's), the applications community were more aggressive with the vendors.
  - MPI was created and the applications community lined up behind it. Vendors responded so that within a year of the first MPI spec, quality implementation were everywhere
  - OpenMP was created and the applications community wrote it into RFPs and committed to it. Within a year of the first OpenMP spec, quality implementations were everywhere.
- Today?
  - Users are letting vendors lock them to a platform. What message are you giving to the vendor community when you use CUDA\* or OpenACC\*? If you won't commit to a vendor neutral, open standard, why should the vendors?

\*Third party names are the property of their owners

# An application programmers biggest fear

---

- **An application programmers biggest fear is that the language they toiled to learn will be the wrong choice**
  - Doesn't give performance
  - Too hard to figure out
  - No interoperability
  - NOT THERE TWO YEARS LATER

# An application programmers biggest fear

---

- An application programmers biggest fear is that the language they toiled to learn will be the wrong choice
  - Doesn't give performance
  - Too hard to figure out
  - No interoperability
  - NOT THERE TWO YEARS LATER

DOE,NERSC and Intel had NOTHING  
to do with this video

# Community input to open standards provides a path forward for portability

---

- **Portability is difficult, nothing about it makes parallel programming easier, except perhaps it encourages the programmer to hide parallelism**
- **People are generally in favor of using open standards and working towards good standards**
  - Examples: MPI Forum, OpenMP Architecture Review Board, etc.

Jeff Squyers (Cisco) at EuroMPI Sept. 2015:

..we will be “Defining what parallel computing will be for the world, this is the MPI forum. For everyone.”

# Whining about performance Portability



- Do we have performance portability today?
  - NO: Even in the “serial world” programs routinely deliver single-digit efficiencies.
  - If the goal is a large fraction of peak performance, you will need to specialize code for the platform.
- But there is a pretty darn good performance portable language. It's called OpenCL



# Matrix multiplication example:

## Naïve solution, one dot product per element of C



- Multiplication of two dense matrices.

The diagram shows the calculation of a single element  $C(i,j)$  from the dot product of a row of matrix  $A$  and a column of matrix  $B$ . On the left, a square represents matrix  $C$  with a small red square at the bottom-left corner labeled  $C(i,j)$ . This is followed by an equals sign. To the right of the equals sign is a square representing matrix  $A$  with a horizontal red bar across its middle labeled  $A(i,:)$ . This is followed by a multiplication symbol  $\times$ . To the right of the multiplication symbol is a square representing matrix  $B$  with a vertical red bar on its left side labeled  $B(:,j)$ .

Dot product of a row of  $A$  and a column of  $B$  for each element of  $C$


- To make this fast, you need to break the problem down into chunks that do lots of work for sub problems that fit in fast memory (OpenCL local memory).

# Matrix multiplication: sequential code



```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    for (i = 0; i < N; i++) {
        for (j = 0; j < N; j++) {
            for (k = 0; k < N; k++) {
                C[i*N+j] += A[i*N+k] * B[k*N+j];
            }
        }
    }
}
```

# Matrix multiplication: sequential code

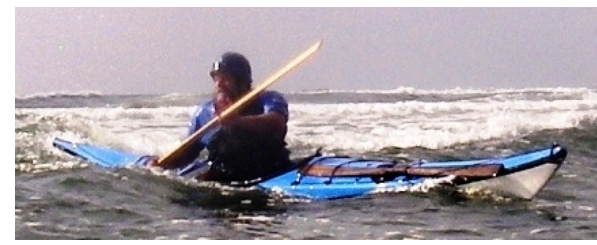

```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    for (i = 0; i < N; i++)
        for (j = 0; j < N; j++)
            for (k = 0; k < N; k++)
                C[i*N+j] += A[i*N+k] * B[k*N+j];
}
```

Let's get rid of all  
those ugly brackets

# Matrix multiplication: sequential code



```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    float tmp;
    int NB=N/block_size; // assume N%block_size=0
    for (ib = 0; ib < NB; ib++)
        for (i = ib*NB; i < (ib+1)*NB; i++)
            for (jb = 0; jb < NB; jb++)
                for (j = jb*NB; j < (jb+1)*NB; j++)
                    for (kb = 0; kb < NB; kb++)
                        for (k = kb*NB; k < (kb+1)*NB; k++)
                            C[i*N+j] += A[i*N+k] * B[k*N+j];
}
```

Break each loop into chunks with a size chosen to match the size of your fast memory

# Matrix multiplication: sequential code




```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    float tmp;
    int NB=N/block_size; // assume N%block_size=0
    for (ib = 0; ib < NB; ib++)
        for (jb = 0; jb < NB; jb++)
            for (kb = 0; kb < NB; kb++)

    for (i = ib*NB; i < (ib+1)*NB; i++)
        for (j = jb*NB; j < (jb+1)*NB; j++)
            for (k = kb*NB; k < (kb+1)*NB; k++)
                C[i*N+j] += A[i*N+k] * B[k*N+j];
}
```

Rearrange loop nest  
to move loops over  
blocks "out" and  
leave loops over a  
single block together




# Matrix multiplication: sequential code

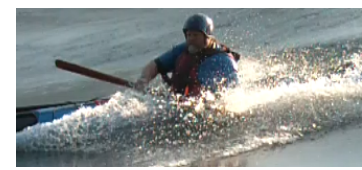


```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    float tmp;
    int NB=N/block_size; // assume N%block_size=0
    for (ib = 0; ib < NB; ib++)
        for (jb = 0; jb < NB; jb++)
            for (kb = 0; kb < NB; kb++)
                for (i = ib*NB; i < (ib+1)*NB; i++)
                    for (j = jb*NB; j < (jb+1)*NB; j++)
                        for (k = kb*NB; k < (kb+1)*NB; k++)
                            C[i*N+j] += A[i*N+k] * B[k*N+j];
}
```

This is just a local  
matrix multiplication  
of a single block

# Matrix multiplication: sequential code

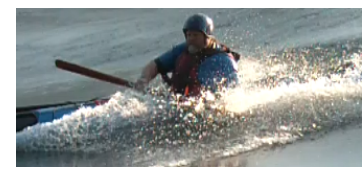

```
void mat_mul(int N, float *A, float *B, float *C)
{
    int i, j, k;
    int NB=N/block_size; // assume N%block_size=0
    for (ib = 0; ib < NB; ib++)
        for (jb = 0; jb < NB; jb++)
            for (kb = 0; kb < NB; kb++)
                sgemm(C, A, B, ...)    //  $C_{ib,jb} = A_{ib,kb} * B_{kb,jb}$ 
```

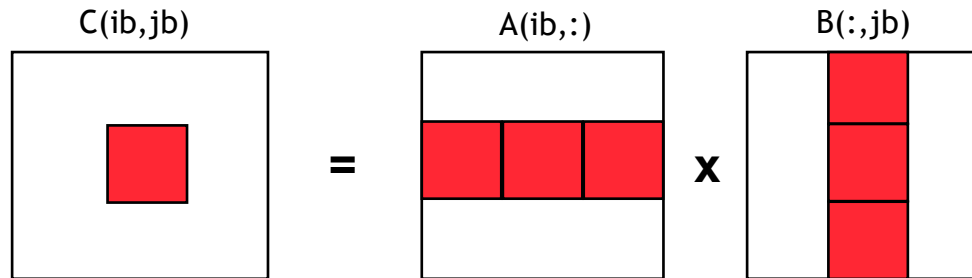

```
}
```

Note: sgemm is the name of the level three BLAS routine to multiply two matrices

# Blocked matrix multiply: kernel



```
#define blksz 16
__kernel void mmul(
    const unsigned int N,
    __global float* A,
    __global float* B,
    __global float* C,
    __local float* Awrk,
    __local float* Bwrk)
{
    int kloc, Kblk;
    float Ctmp=0.0f;

    // compute element C(i,j)
    int i = get_global_id(0);
    int j = get_global_id(1);

    // Element C(i,j) is in block C(Iblk,Jblk)
    int Iblk = get_group_id(0);
    int Jblk = get_group_id(1);

    // C(i,j) is element C(iloc, jloc)
    // of block C(Iblk, Jblk)
    int iloc = get_local_id(0);
    int jloc = get_local_id(1);
    int Num_BLK = N/blksz;
```

```
// upper-left-corner and inc for A and B
int Abase = Iblk*N*blksz;  int Ainc  = blksz;
int Bbase = Jblk*blksz;    int Binc  = blksz*N;

// C(Iblk,Jblk) = (sum over Kblk)
// A(Iblk,Kblk)*B(Kblk,Jblk)
for (Kblk = 0; Kblk<Num_BLK; Kblk++)
{
    //Load A(Iblk,Kblk) and B(Kblk,Jblk).
    //Each work-item loads a single element of the two
    //blocks which are shared with the entire work-group

    Awrk[jloc*blksz+iloc] = A[Abase+jloc*N+iloc];
    Bwrk[jloc*blksz+iloc] = B[Bbase+jloc*N+iloc];

    barrier(CLK_LOCAL_MEM_FENCE);

    #pragma unroll
    for(kloc=0; kloc<blksz; kloc++)
        Ctmp+=Awrk[jloc*blksz+kloc]*Bwrk[kloc*blksz+iloc];

    barrier(CLK_LOCAL_MEM_FENCE);

    Abase += Ainc;    Bbase += Binc;
}
C[j*N+i] = Ctmp;
}
```

# Blocked matrix multiply: kernel



```
#define blksz 16
```

```
__kernel void mmul(
```

```
    const unsigned int N,
```

```
    __global float* A,
```

```
    __global float* B,
```

```
    __global float* C,
```

```
    __local float* Awrk,
```

```
    __local float* Bwrk)
```

```
{  
    int kloc, Kblk;  
    float Ctmp=0.0f;
```

Load A and B  
blocks, wait for all  
work-items to finish

```
    // compute element C(i,j)
```

```
    int i = get_global_id(0);
```

```
    int j = get_global_id(1);
```

```
    // Element C(i,j) is in block C(Iblk,Jblk)
```

```
    int Iblk = get_group_id(0);
```

```
    int Jblk = get_group_id(1);
```

```
    // C(i,j) is element C(iloc, jloc)
```

```
    // of block C(Iblk, Jblk)
```

```
    int iloc = get_local_id(0);
```

```
    int jloc = get_local_id(1);
```

```
    int Num_BLK = N/blksz;
```

```
    // upper-left-corner and inc for A and B
```

```
    int Abase = Iblk*N*blksz;  int Ainc  = blksz;
```

```
    int Bbase = Jblk*blksz;    int Binc  = blksz*N;
```

```
    // C(Iblk,Jblk) = (sum over Kblk)
```

```
    A(Iblk,Kblk)*B(Kblk,Jblk)
```

```
    for (Kblk = 0; Kblk<Num_BLK; Kblk++)
```

```
    {  //Load A(Iblk,Kblk) and B(Kblk,Jblk).
```

```
        //Each work-item loads a single element of the two
```

```
        //blocks which are shared with the entire work-group
```

```
        Awrk[jloc*blksz+iloc] = A[Abase+jloc*N+iloc];
```

```
        Bwrk[jloc*blksz+iloc] = B[Bbase+jloc*N+iloc];
```

```
        barrier(CLK_LOCAL_MEM_FENCE);
```

```
        #pragma unroll
```

```
        for(kloc=0; kloc<blksz; kloc++)
```

```
        Ctmp+=Awrk[jloc*blksz+kloc]*Bwrk[kloc*blksz+iloc];
```

```
        barrier(CLK_LOCAL_MEM_FENCE);
```

```
        Abase += Ainc;  Bbase += Binc;
```


```
    }
```

```
    C[j*N+i] = Ctmp;
```

```
}
```

Wait for  
everyone to  
finish before  
going to next  
iteration of Kblk  
loop.

# Matrix multiplication ... Portable Performance

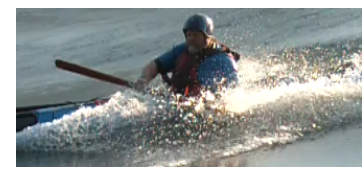

- Single Precision matrix multiplication (order 1000 matrices)

Case	CPU	Xeon Phi	Core i7, HD Graphics	NVIDIA Tesla
Sequential C (compiled /O3)	224.4		1221.5	
C(i,j) per work-item, all global	841.5	13591		3721
C row per work-item, all global	869.1	4418		4196
C row per work-item, A row private	1038.4	24403		8584
C row per work-item, A private, B local	3984.2	5041		8182
Block oriented approach using local (blksz=16)	12271.3	74051 (126322*)	38348 (53687*)	119305
Block oriented approach using local (blksz=32)	16268.8			

Could I do this with OpenMP today? No. But I look forward to trying once OpenMP is ready

Xeon Phi SE10P, CL\_CONFIG\_MIC\_DEVICE\_2MB\_POOL\_INIT\_SIZE\_MB = 4 MB

\* The comp was run twice and only the second time is reported (hides cost of memory movement).

Intel® Core™ i5-2520M CPU @2.5 GHz (dual core) Windows 7 64 bit OS, Intel compiler 64 bit version 13.1.1.171, OpenMP 4.5

Intel Core i7-4850HQ @ 2.3 GHz which has an Intel HD Graphics 5200 w/ high speed memory. ICC 2013 sp1 update 2.


Tesla® M2090 GPU from NVIDIA® with a max of 16 compute units, 512 PEs

Third party names are the property of their owners.

These are not official benchmark results. You may observe completely different results should you run these tests on your own system.


# BUDE: Bristol University Docking Engine

One program running well on a wide range of platforms

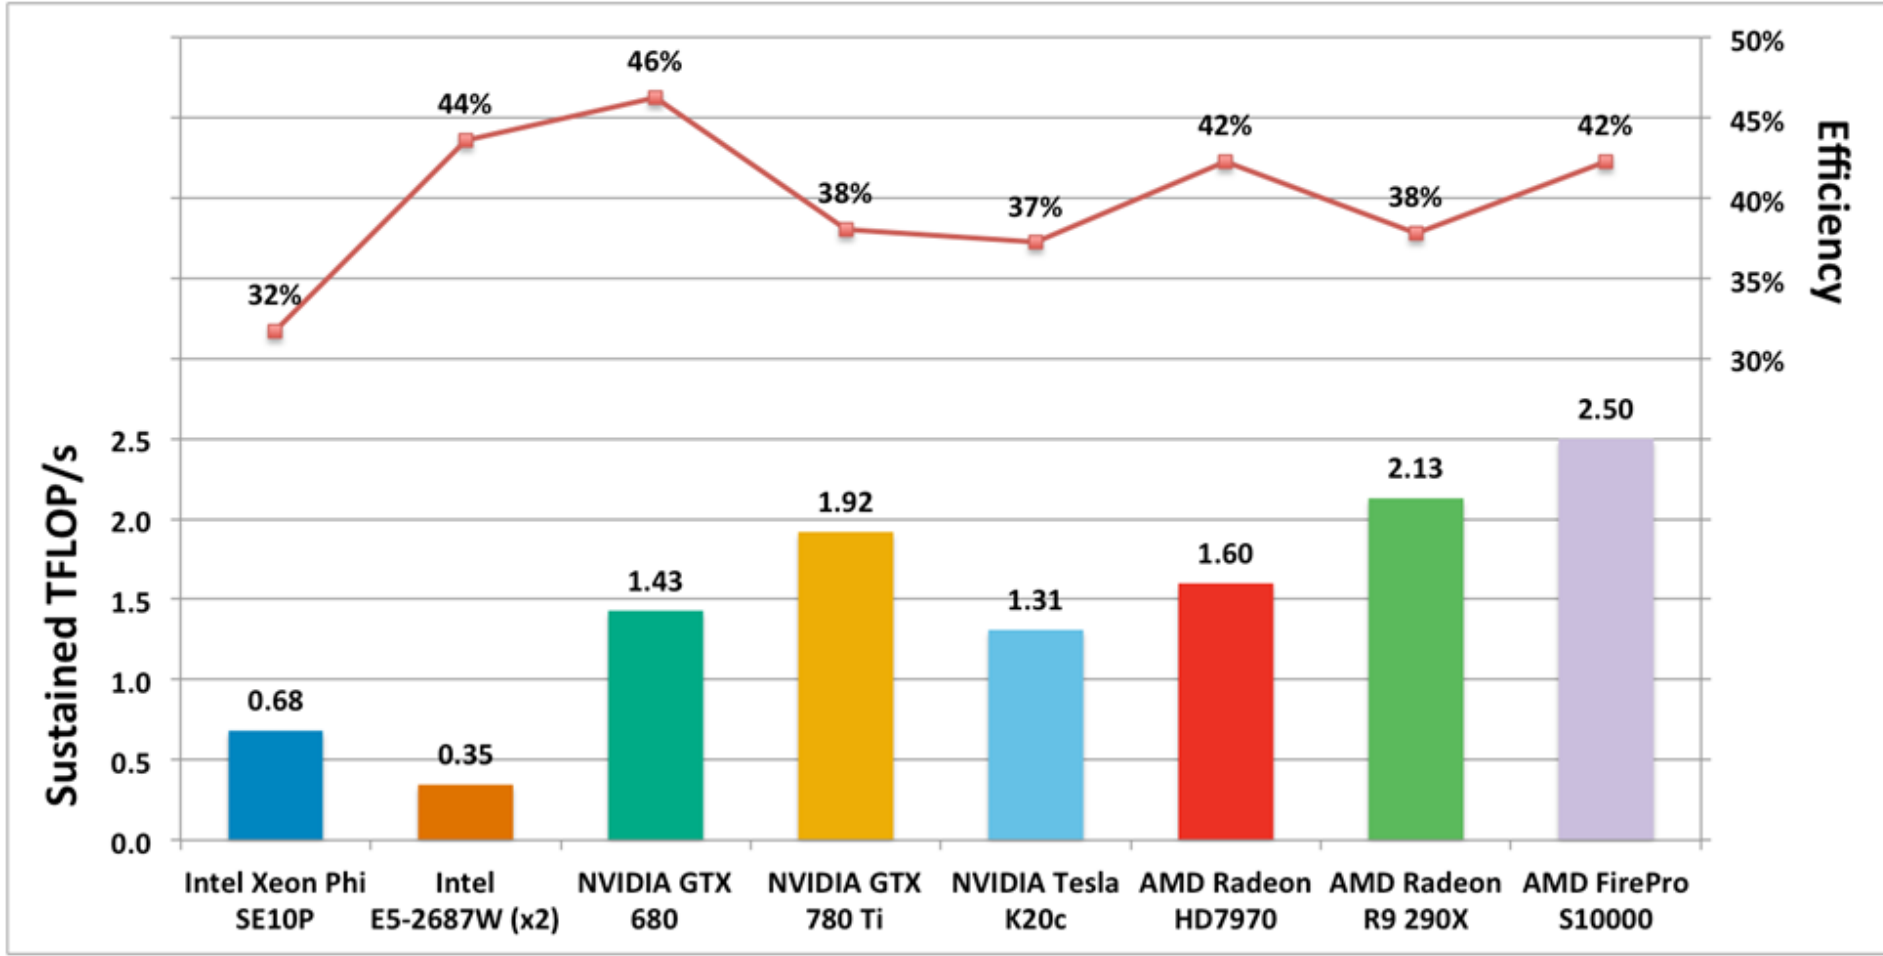



# Whining about performance Portability

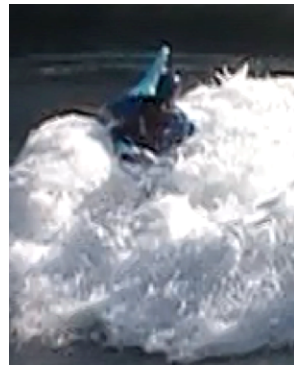

- Do we have performance portability today?
  - NO: Even in the “serial world” programs routinely deliver single digit efficiencies.
  - If the goal is a large fraction of peak performance, you will need to specialize code for the platform.
- However there is a pretty darn good performance portable language. It’s called OpenCL
- But this focus on mythical “Performance Portability” misses the point. The issue is “maintainability”.
  - You must be able maintain a body of code that will live for many years over many different systems.
  - Having a common code base using a portable programming environment ... even if you must fill the code with if-defs or have architecture specific versions of key kernels ... is the only way to support maintainability.

# ~35 Application White Papers submitted to recent DOE Workshop on Portability

---

- **Take-aways:**

- Almost Everyone is prepared to try/use OpenMP4.0 and beyond to help with portability issues
- Even with OpenMP accelerator directives, etc., two different source codes are necessary
- Different source codes for two or more parallel programming constructs does encourage people to contain parallel code
  - This is not as easy to see in directive based approaches as with other approaches based more on libraries
- Most people are resigned to having different sources for different platforms, with simple `#ifdef` or other mechanisms

# What is holding OpenMP back


---

- **Mature implementations are not everywhere**
- **Standard for accelerators is still being defined**
- **Performance is not there yet (see next two slides):**


On the performance portability of structured grid codes on many-core computer architectures", S.N. McIntosh-Smith, M. Boulton, D. Curran and J.R. Price. ISC, Leipzig, pp 53-75, June 2014.

# On the Performance Portability of structured Grid codes

... McIntosh-Smith et.al. ISC 2014

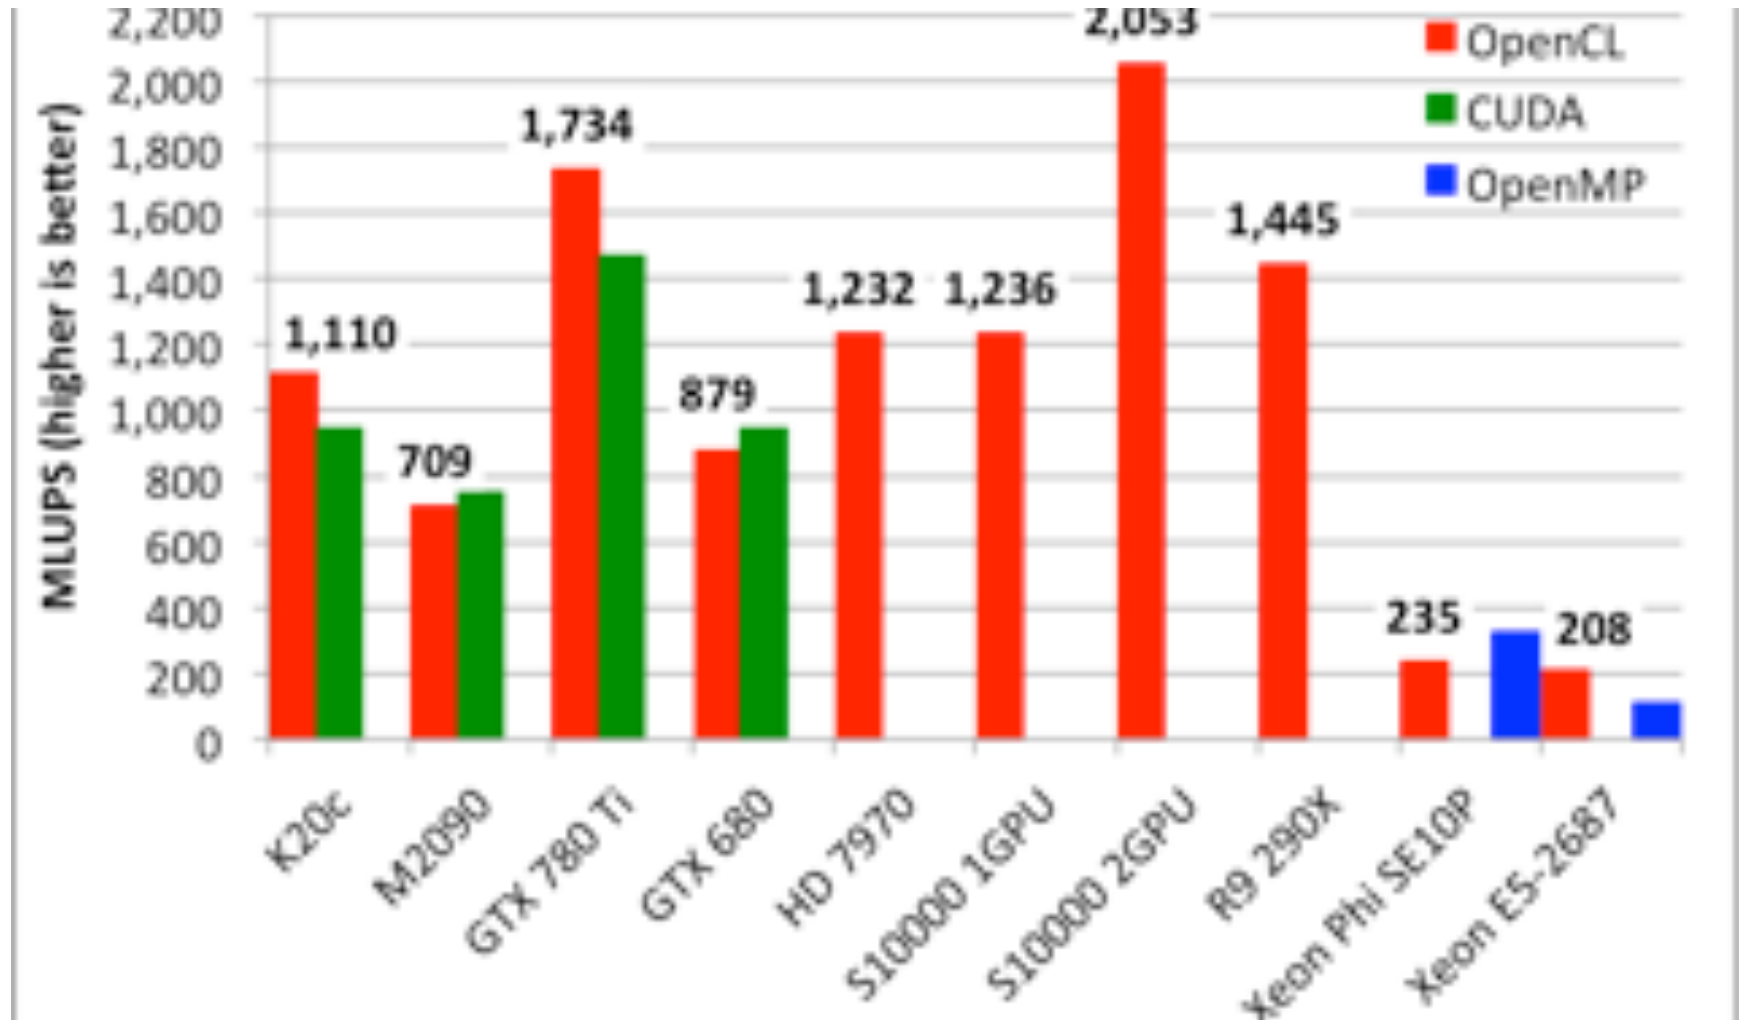


# On the Performance Portability of structured Grid codes . . . McIntosh-Smith et.al. ISC 2014

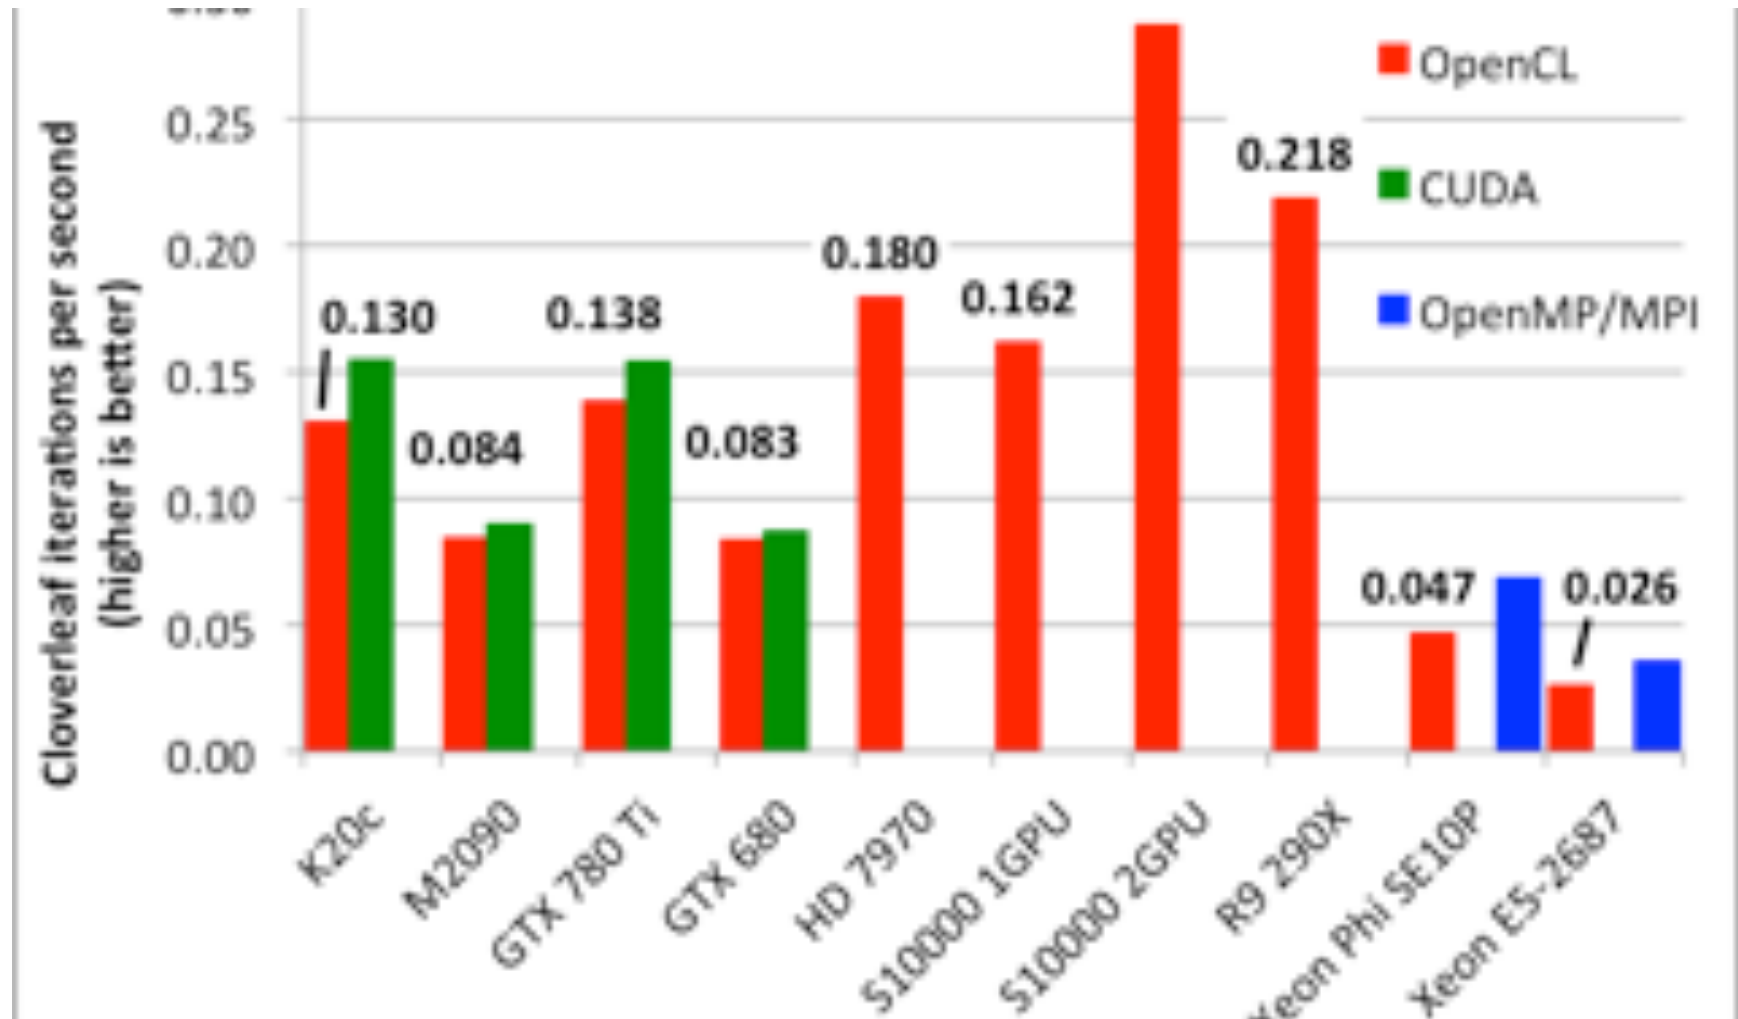

# Sparse matrix vector product: GPU vs. CPU



- [Vazquez09]: reported a 51X speedup for an NVIDIA® GTX295 vs. a Core 2 Duo E8400 CPU ... but they used an old CPU with unoptimized code

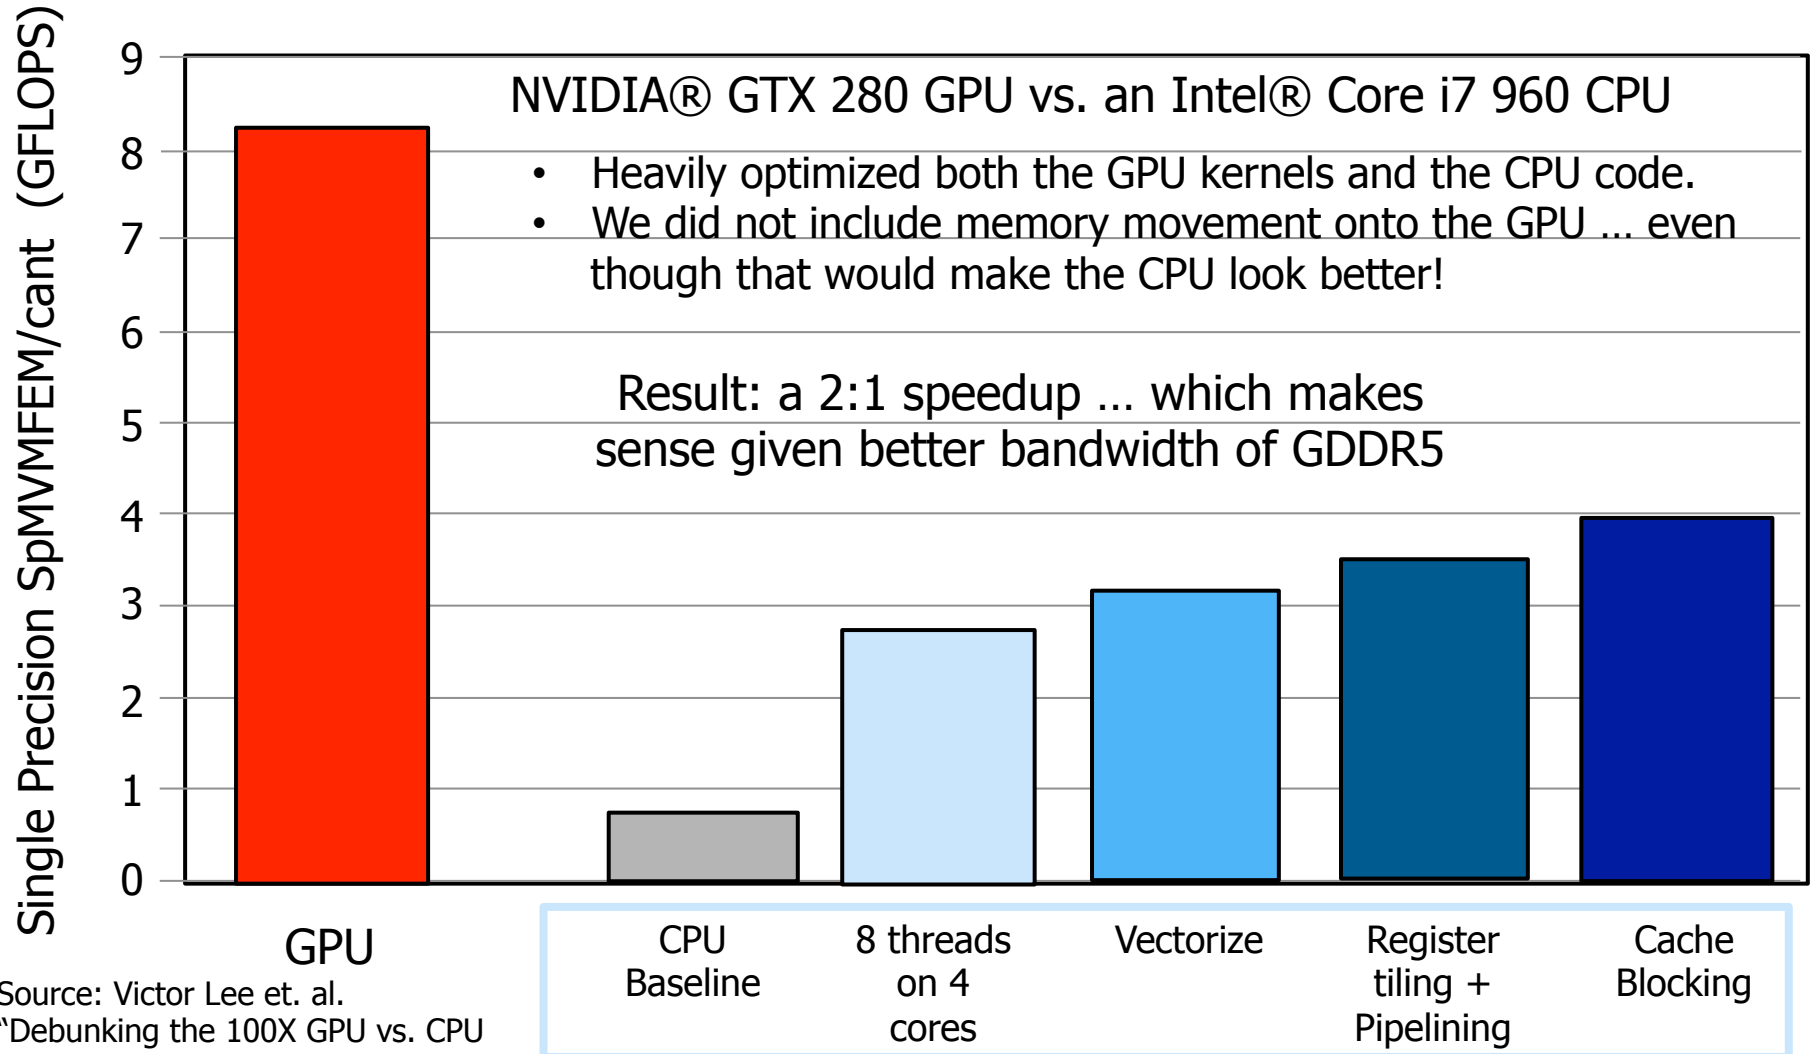


\*third party names are the property of their owners




# CASE STUDY: XGC1 PIC Fusion Code

- Particle-in-cell code used to study turbulent transport in magnetic confinement fusion plasmas.
- Uses fixed unstructured grid. Hybrid MPI/OpenMP for both spatial grid and particle data. (plus PGI CUDA Fortran, OpenACC)
- Excellent overall MPI scalability
- Internal profiling timer borrowed from CESM
- Uses PETSc Poisson Solver (separate NESAP effort)
- 60k+ lines of Fortran90 codes.
- For each time step:
  - Deposit charges on grid
  - Solve elliptic equation to obtain electro-magnetic potential
  - Push particles to follow trajectories using forces computed from background potential (~50-70% of time)
  - Account for collision and boundary effects on velocity grid
- Most time spent in Particle Push and Charge Deposition

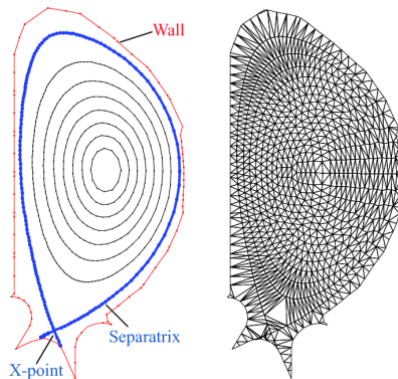

Unstructured triangular mesh grid due to complicated edge geometry

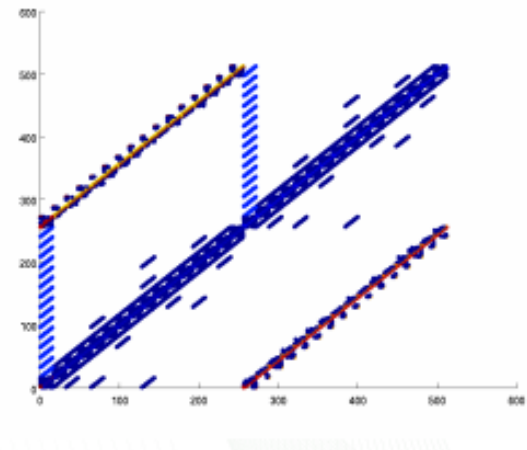

Sample Matrix of communication volume

# Programming Portability

---

- **Currently XGC1 runs on many platforms**
- **Part of NESAP and ORNL CAAR programs**
- **Applied for ANL Theta program**
- **Previously used PGI CUDA Fortran for accelerators**
- **Exploring OpenMP 4.0 target directives and OpenACC.**
- **Have `#ifdef _OpenACC` and `#ifdef _OpenMP` in code.**
- **Hope to have as fewer compiler dependent directives as possible.**
- **Nested OpenMP is used**
- **Needs thread safe PSPLIB and PETSc libraries.**

# CUDA Fortran code conversion (Jianying Lang, PPPL)

## GPU kernel subroutine

### Call host program in FORTRAN

```
#ifdef USE_GPU
  call pushe_gpu (istep,...,...)
#else
  call pushe (istep,...,...)
#endif
```

### Launch GPU kernel in host program

```
call
pushe_kernel_gpu<<<blocks,t
hreads>>>(istep,epc,phase0_g
pu,diag_on,dt_now)
```

```
attributes(global) &
subroutine pushe_kernel_gpu(istep,ipc,phase0, &
                           diag_on,dt_now)
  .
  .
  .
  ith = 1+ ((threadIdx%x-1) + (threadIdx%y-1)*blockDim%x) + &
    ((blockIdx%x-1) + (blockIdx%y-1)*gridDim%x) * &
    (blockDim%x * blockDim%y)
  do i=ith-1, sp_num_gpu, nthreads_dim
    if(ptl_gid_gpu(i)>0) then
      x=ptl_ph_gpu(i,1:2)
      phi=ptl_ph_gpu(i,3)
      phi_mid=(floor(phi/grid_delta_phi) + 0.5_work_p) * &
        grid_delta_phi
      call field_following_pos2_gpu(x,phi,phi_mid,xff)
      call search_tr2_gpu(xff,itr,p)
    .
    .
  .
```

# Current Implementation XGC1 code(example)

```
#ifdef _OPENACC
```

```
!$acc kernels present(Ms,EDs) ASYNC(istream)
```

```
!$acc loop independent collapse(2) gang
```

```
#else
```

```
!$OMP PARALLEL DO default(none) &
```

```
!$OMP& shared(mesh_Nzm1,mesh_Nrm1,f_half,dfdr,dfdz,Ms) &
```

```
!$OMP& shared(cs1,cs2,EDs,mass1,mass2) &
```

```
!$OMP& PRIVATE( index_I,index_J, index_2D, index_ip, index_jp, index_2dp, &
```

```
!$OMP& shared(cs1_mesh_r_half,cs1_mesh_z_half) &
```

```
!$OMP& shared(cs2_mesh_r_half,cs2_mesh_z_half) &
```

```
!$OMP& num_threads(col_f_nthreads)
```

```
#endif
```

```
do index_I=1, mesh_Nzm1
```

```
do index_J=1, mesh_Nrm1
```

```
z = cs1_mesh_z_half(index_I)
```

```
.....
```

```
!$acc loop independent collapse(2) vector
```

```
do index_ip = 1, mesh_Nzm1
```

```
do index_jp = 1, mesh_Nrm1
```

```
c = cs2_mesh_z_half(index_ip)
```

```
.....
```

```
#ifdef _OPENACC
```

```
!$acc end kernels
```

```
#endif
```

- Use **preprocessor statement** to switch between OpenMP and OpenACC
- Vectorization is critical for both Cori and Summit

# Some Recommendations from Portability Workshop

## Especially w.r.t. Library Portability

---

- **Common base software environment across HPC Centers**
  - Base HPC software stack (standard base set of libs, tools)
  - Share software build, installation, management, testing procedures/mechanisms for HPC centers (e.g. spack)
  - SW development utilities for users
  - Common build recipes, methods at HPC centers
- **Performance portability: encourage investment, adoption, & guidance**
  - Back-end code generation
  - Compiler-based approaches: LLVM/JIT, Rose
  - Open Standards for Parallel Computing
  - C++11/14/17
- **DOE investment in standards committees**
- **Library developers can define strict interface, then ask vendors to confirm to them**
- **Extensions to MPI to exploit fine-grained parallelism (intra-node)**
- **Ability to transform individual research projects or libraries into production capabilities**

# No One-Size Fits all solutions

---

- **With MPI we made it work, eventually**
- **Didn't matter which of the characteristics your application had –**
  - Particles – divide among processors
  - Grid – hand-off sections
  - Matrix –divide off rows and columns
- **We may come to the conclusions that no one heterogeneous architecture nor one single parallel programming model will work for all applications**



# Portable parallel programming is in bad shape. Who to blame?



- Application programmers ...  
This mess is your fault!
- We live in a market economy. Your interests (consistent and stable environments across platforms from multiple vendors) are not the same as the vendor's interests.
- When you reward vendors for bad behavior (e.g. pushing their own standards), you get what you deserve.
- History has shown you the solution!
  - **Unite and fight back. Revolt and force the change you need!!!!**
  - Isolated, you lack power. Together you can shape the industry.
  - Just look at the creation of MPI and OpenMP and OpenCL.
  - Be firm in your resolve:
    - ONLY USE vendor neutral, open standards (e.g. OpenMP, OpenCL, MPI)
    - Standards take commitment and hard work. Join us in that work.




# NERSC is the Mission HPC Facility for DOE Office of Science Research




U.S. DEPARTMENT OF  
**ENERGY**

Office of  
Science


Largest funder of physical  
science research in U.S.

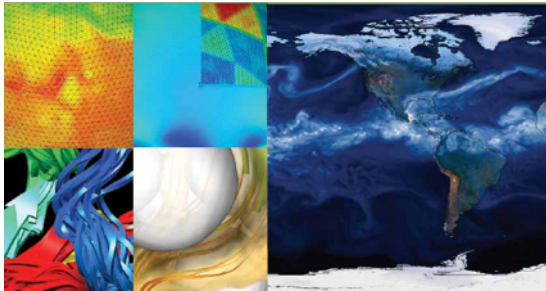


Bio Energy, Environment

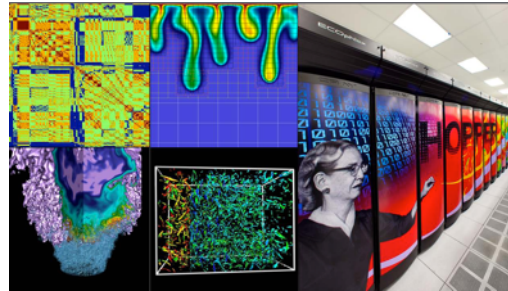


Computing

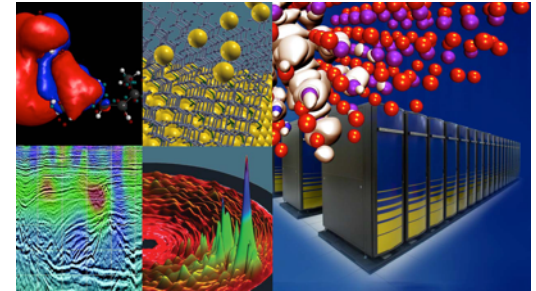


Materials, Chemistry,  
Geophysics

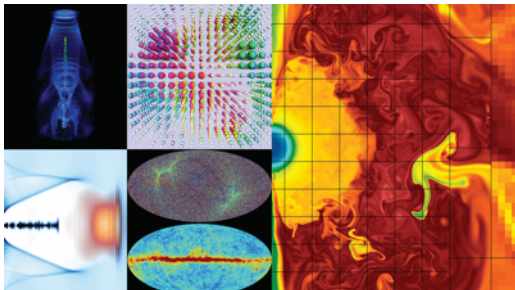

Particle Physics,  
Astrophysics

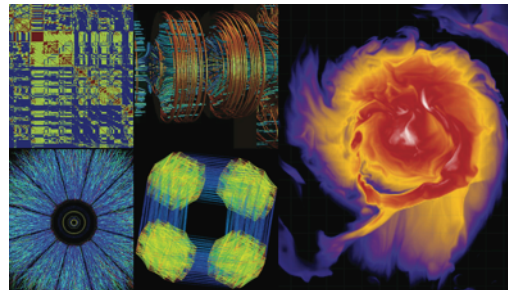

Nuclear Physics

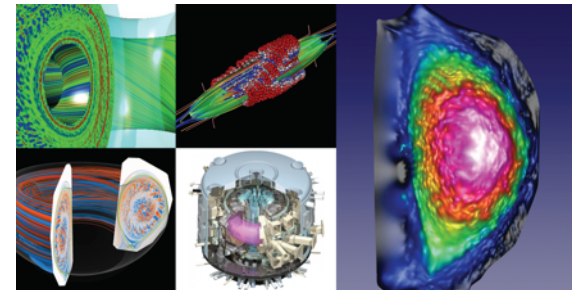

Fusion Energy,  
Plasma Physics